

Portable power quality analysis center

Features

- 7" touchscreen - ergonomic and intuitive graphical user interface.
- Over 10 years of recording.
- CAT IV 600 V measurement category - high safety.
- All parameters according to class S - high accuracy of measurements.
- Li-Ion rechargeable battery - higher mobility.
- Powering from measured network - reliability of measurements.
- Removable memory card - recording data with no restrictions.
- Quick setup and reporting - ease of use.
- Cooperation with desktop Sonel Analysis software - extended data analysis.

Measured parameters

- Inrush current.
- Inverter efficiency.
- Voltages L1, L2, L3, N, PE (five measurement inputs) – average, minimum, maximum and instant values within the range up to 760 V, interoperability with voltage transducers.
- Currents L1, L2, L3, N (four measurement inputs) – average, minimum and maximum values, current measurement within the range up to 6 kA (depending on applied current clamp), interoperability with current transducers.
- Crest factors for current CFI and voltage CFU.
- Frequency within the range of 40...70 Hz.
- Active (P), reactive (Q), distortion (D) and apparent (S) power with the type of reactive power (capacitive and inductive).
- Active (E_p), reactive (E_Q) and apparent (E_S) energy.
- Power factor PF, $\cos\phi$, $\tan\phi$.
- Harmonics up to the 50th order of voltage and current.
- Event logging for current and voltage along with oscillograms and half-period RMS charts.
- 30-day load studies acc. to NEC220.87 standard
- Energy cost calculator.
- ...and much more.
- All parameters are recorded in compliance with class S according to IEC 61000-4-30 standard




Wide range of mains to analyze

- With rated frequency 50/60 Hz
- With rated voltages: 58/100 V, 64/110 V, 110/190 V, 115/200 V, 120/208 V, 127/220 V, 133/230 V, 220/380 V, 230/400 V, 240/415 V, 254/440 V, 290/500 V, 400/690 V
- Direct current
- Systems:
 - » single-phase
 - » split-phase with common N
 - » three-phase – WYE with and without N conductor
 - » three-phase – Delta
 - » three-phase – WYE and Delta Aron
 - » with current and voltage transducers



Capabilities

PQM-707 is an autonomous meter allowing versatile measurement, analysis, and registration of energy network (DC and 50/60 Hz) parameters. All parameters are measured I/A/W class S of the IEC 61000-4-30 standard guaranteeing high accuracy of measurements. The **7-inch colour touchscreen** - The largest in this class of analyzers! - enables intuitive and ergonomic operation. Thanks to the built-in lithium-ion battery, the analyzer allows for efficient work during the measurement without the necessity of connecting an external AC adapter.

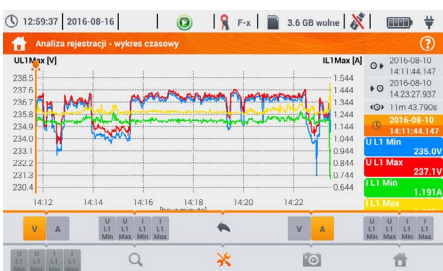

Displaying data

The analyzer is equipped with a readable colour touchscreen. Its **800 x 480 pixel** resolution provides both high comfort of interacting with the interface and high readability of the measurement results. **The included stylus allows you to work with dielectric gloves.**



Application

The analyzer is directed to a very wide range of users, with particular reference to the maintenance staff. Due to its mobility and autonomy, any problems occurring in the supply networks can be diagnosed on the spot. The analyzer can be used in virtually all kinds of networks with rated voltage from 54 V to 760 V - directly or indirectly via transducers. PQM-707 can be used in the field of professional power engineering, maintenance services in industrial plants, as well as among those providing services focused on network analysis.



Durable and practical casing









The casing has been designed to allow easy access to the touchscreen and all measurement and communication sockets. Folding lid protects the display from damages. Thanks to the IP51 protection degree, the device can be used in difficult conditions - it is not afraid of dust or water splashes.

Parameters

Parameter		Measuring range	Max. resolution	Accuracy
Alternating voltage (TRMS)	–	0.0...760.0 V	4 significant digits	$\pm 0.5\% V_{nom}$
Crest Factor	Voltage	1.00...10.00 ($\leq 1,65$ for 690 V)	0.01	$\pm 5\%$
	Current	1.00...10.00 (≤ 3.6 for I_{nom})	0.01	$\pm 5\%$
Alternating current (TRMS)	–	depending on clamp *	$0.01\% I_{nom}$	$\pm 0.2\% I_{nom}$ (error does not account for clamp error)
Frequency	–	40.00...70.00 Hz	0.01 Hz	± 0.05 Hz
Active, reactive, apparent and distortion power	–	depending on configuration (transducers, clamps)	4 significant digits	depending on configuration (transducers, clamps)
Active, reactive and apparent energy	–	depending on configuration (transducers, clamps)	4 significant digits	as power error
cos ϕ and power factor (PF)	–	0.00...1.00	0.01	± 0.03
tan ϕ	–	0.00...10.00	0.01	depends on error of active and reactive power
Harmonics	Voltage	DC, 1...50	as for alternating voltage True RMS	$\pm 0.15\% V_{nom}$ for m.v. < 3% V_{nom} $\pm 5\%$ m.v. for m.v. $\geq 3\% V_{nom}$
	Current	DC, 1...50	as for alternating current True RMS	$\pm 0.5\% I_{nom}$ for m.v. < 10% I_{nom} $\pm 5\%$ m.v. for m.v. $\geq 10\% I_{nom}$
THD	Voltage	0.0...100.0% (relative to RMS value)	0.1%	$\pm 5\%$
	Current			$\pm 5\%$
Flicker index	–	0.40...10.00	0.01	$\pm 10\%$
Unbalance factor	Voltage and current	0.0...10.0%	0.1%	$\pm 0,15\%$ (absolute error)
Inrush current	Current	depending on clamp *	$0.01\% I_{nom}$	$\pm 4\%$ m.v. for m.v. $\geq 10\% I_{nom}$ $\pm 4\% I_{nom}$ for m.v. < 10% I_{nom} (RMS _{1/2})

m.v. – measured value

* F-1A1, F-2A1, F-3A1 probe: 0...1500 A AC (5000 A_{pp}) • F-1A, F-2A, F-2(US), F-3A probe: 0...3000 A AC (10 000 A_{pp}) • F-1A6, F-2A6, F-3A6 probe: 0...6000 A AC (20 000 A_{pp})
C-4A(US) probe: 0...1000 A AC (3600 A_{pp}) • C-5A (US) probe: 0...1000 A AC/DC (3600 A_{pp}) • C-6A (US) probe: 0...10 A AC (36 A_{pp}) • C-7A (US) probe: 0...100 A AC (360 A_{pp})

								
	C-4A(US)	C-5A(US)	C-6A(US)	C-7A(US)	F-2A(US)	F-1A1 / F-1A / F-1A6	F-2A1 / F-2A / F-2A6	F-3A1 / F-3A / F-3A6
	WACEGC4A0KRUSA	WACEGC5A0KRUSA	WACEGC6A0KRUSA	WACEGC7A0KRUSA	WACEGF2A0KRUSA	WACEGF1A10KR WACEGF1A0KR WACEGF1A60KR	WACEGF2A10KR WACEGF2A0KR WACEGF2A60KR	WACEGF3A10KR WACEGF3A0KR WACEGF3A60KR
Rated current	1000 A AC	1000 A AC 1400 A DC	10 A AC	100 A AC	3000 A AC	1500 / 3000 / 6000 A AC		
Frequency	30 Hz...10 kHz	DC...5 kHz	40 Hz...10 kHz	40 Hz...1 kHz	10 Hz...20 kHz	40 Hz...10 kHz		
Output signal level	1 mV / 1 A	1 mV / 1 A	100 mV / 1 A	5 mV / 1 A	38.8 μ V / 1 A	77.6 μ V / 1 A	38.8 μ V / 1 A	19.4 μ V / 1 A
Max. diameter of measured conductor	52 mm	39 mm	20 mm	24 mm	450 mm	360 mm	235 mm	120 mm
Minimum accuracy	$\leq 0.5\%$	$\leq 1.5\%$	$\leq 1\%$	0.5%	0.5%	1%		
Battery power	–	✓	–	–	–	–		
Lead length	2.2 m	2.2 m	2.2 m	3 m	2.5 m	2.2 m		
Measurement category	IV 300 V	IV 300 V	IV 300 V	III 300 V	IV 600 V	IV 600 V		
Ingress protection	IP40				IP65	IP67		

SONEL ANALYSIS




Sonel Analysis software - application delivered as standard accessory, indispensable for working with PQM-series analyzers. It enables:

- analyzer configuration,
- data reading from logger,
- preview of network parameters in real time (with capability of reading via GSM modem),
- deletion of data in the analyzer,
- data presentation in tables,
- data presentation in charts,
- data analysis in compliance with standard EN 50160 (reports) and other user defined reference conditions,
- independent support of multiple analyzers,
- analyzer firmware updates.

The software enables readout of selected parameters and their visualization in real time. These parameters are measured independently from the registration saved on the memory card. The user can view:

- charts of voltage and current progression (oscilloscope),
- charts of voltage and current over time,
- phasor diagram,
- measurements of multiple parameters,
- harmonics and harmonic powers,
- interharmonics.

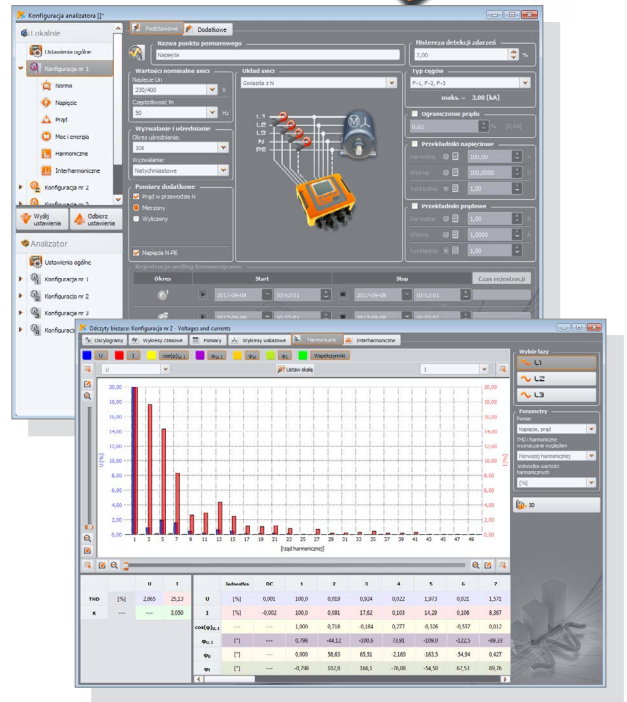

Standard accessories

Test lead markers



brown/yellow/orange/gray/black/red/blue/white (4 pcs)
 WAOZNPRZBRUSA
 WAOZNPRZYEUUSA
 WAOZNPRZORUSA
 WAOZNPRZGRUSA
 WAOZNPRZBLUSA
 WAOZNPRZREUSA
 WAOZNPRZBUUSA
 WAOZNPRZWHUSA

green (2 pcs)
 WAOZNPRZGRNUSA



Crocodile clip 1 kV CAT III 32 A

black/red/blue/white/green
 WAKROBL30K03USA
 WAKRORE30K03USA
 WAKROBU30K03USA
 WAKROWH30K03USA
 WAKROGRN30K03USA



Magnetic adapter

blue/black/white/red
 WAADAUMAGKBU
 WAADAUMAGKBL
 WAADAUMAGKWH
 WAADAUMAGKRE



4x F-2A(US) flexible probe (Ø 235 mm) 0...3 kA AC

WACEGF2AOKRUSA



5x 2 m lead (black) 1 mm² CAT III 1 kV 19 A with banana plugs

WAPRZ002BLUSA



Li-Ion rechargeable battery 10.8 V 3.35 Ah

WAAKU15USA



Power supply

Z-7 power supply
 WAZASZ7

AZ-2 adapter
 WAAZAAZ2USA

125 V power cord (IEC C7 plug)
 WAPRZLAD230US

battery charging cable for 12 V car sockets
 WAPRZLAD12SAM



Carrying & mounting

L-4 carrying case
 WAFUTL4

strap for carrying the meter
 WAPOZPASS5

magnetic holder for hanging the meter
 WAPOZUCH7



Data transmission & analysis

USB data transmission cable
 WAPRZUSB

Sonel Analysis 4 software for PQM series
 WAPROANALIZA4

Optional accessories



F-1A flexible probe
(Φ=360 mm)

1.5 kA: WACEGF1A10KR
3 kA: WACEGF1A0KR
6 kA: WACEGF1A60KR



F-2A flexible probe
(Φ=235 mm)

1.5 kA: WACEGF2A10KR
3 kA: WACEGF2A0KR
6 kA: WACEGF2A60KR



F-3A flexible probe
(Φ=120 mm)

1.5 kA: WACEGF3A10KR
3 kA: WACEGF3A0KR
6 kA: WACEGF3A60KR



C-4A (US) probe
(Ø 52 mm)
1000 A AC

WACEG4A0KRUSA



C-5A (US) probe
(Ø 39 mm)
1000 A AC/DC

WACEG5A0KRUSA



C-6A (US) probe
(Ø 20 mm)
10 A AC

WACEG6A0KRUSA



C-7A (US) probe
(Ø 24 mm)
100 A AC

WACEG7A0KRUSA



L2 carrying case
for probes

WAWALL2



Magnetic voltage
adapter

black
WAADAUMAGKBL
blue
WAADAUMAGKBU



Pin probe, blue 1 kV
(banana socket)

black
WASONBLOGB1

blue
WASONBUOGB1



Pin probe, blue 1 kV
(banana socket)

red
WASONREOGB1

yellow
WASONYEOGB1



Voltage adapter
with M4/M6
thread - set 5 pcs

WAADAM4M6



Flat test clip
(grip - banana
socket) (5 pcs)

WASONKCB1KPL



Test clips with steel
jaws - set (5 pcs)

WASONKGB1KPL



Adapter for control
terminals (5 pcs)

WAADAPRZKPL1



AGT-16T industrial
socket adapter
16 A / 32 A

WAADAAGT16T
WAADAAGT32T



ASX-1 piercing
adapter - set (4 pcs)

WAADAPRZASX1



Cover with a
magnetic strip
(universal)

WAPOZUCH8



AGT-16C three-
phase socket adapt-
er 16 A / 32 A (PEN)

WAADAAGT16C
WAADAAGT32C



AGT-16P three-
phase socket
adapter 16 A / 32 A


WAADAAGT16P
WAADAAGT32P



AGT-63P three-
phase socket
adapter 63 A

WAADAAGT63P



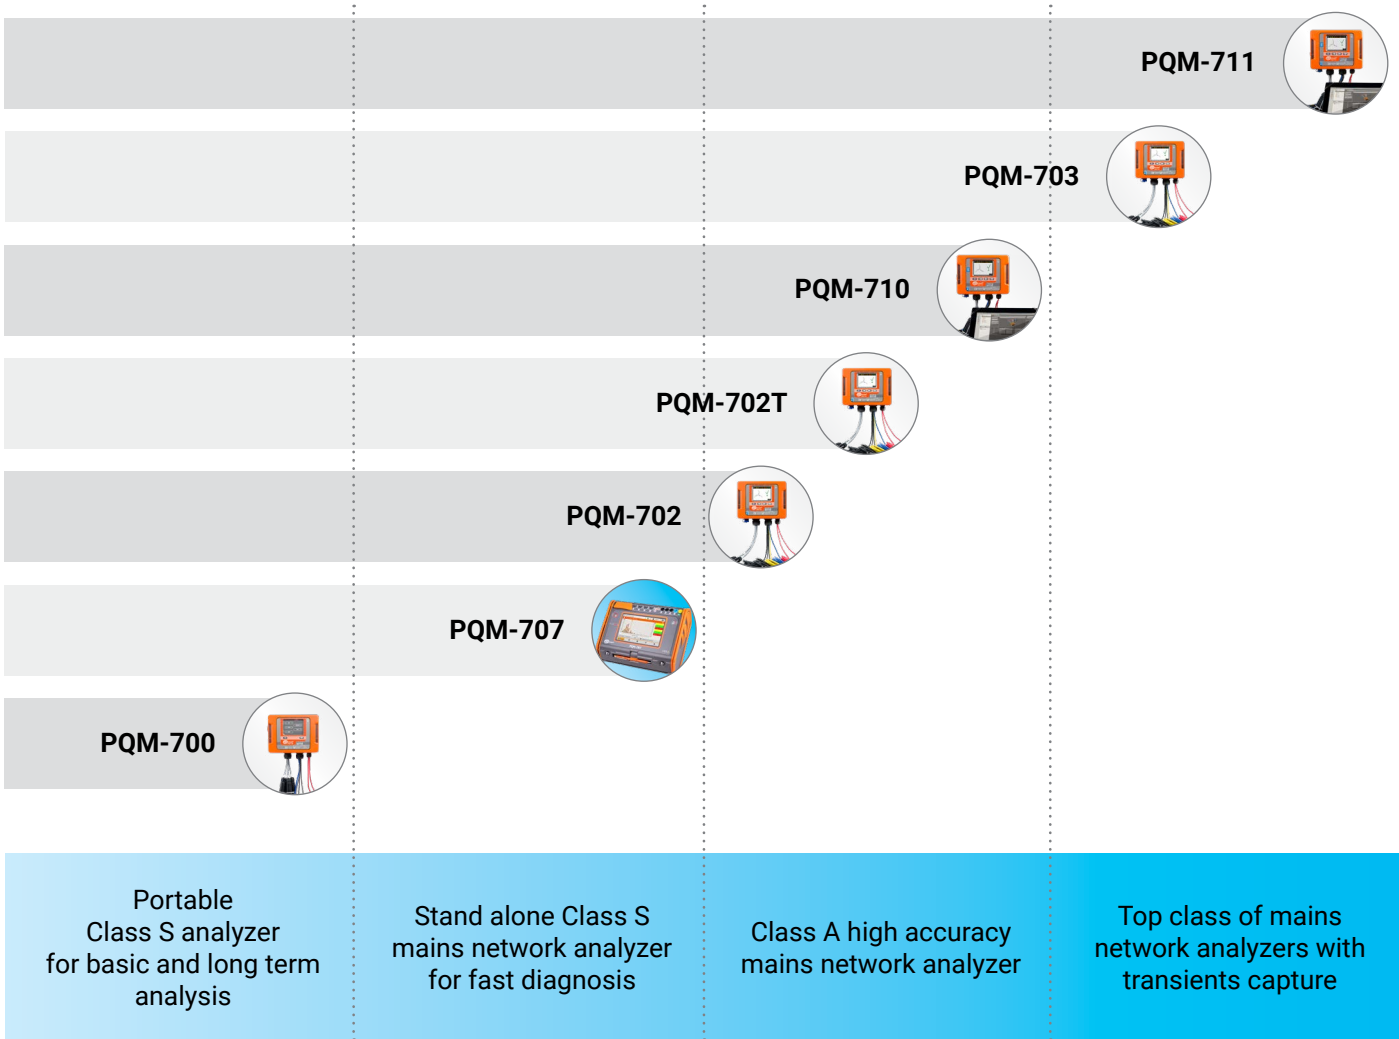

INSULATION RESISTANCE METERS

MIC-30 INSULATION RESISTANCE METER

MIC-5010 INSULATION RESISTANCE METER

MIC-10k1 INSULATION RESISTANCE METER

EARTH RESISTANCE AND RESISTIVITY METERS

MIRU-30 EARTH RESISTANCE AND RESISTIVITY METER

MIRU-200-GPS EARTH RESISTANCE AND RESISTIVITY METER

POWER QUALITY ANALYZERS

PQM-700 POWER QUALITY ANALYZER

PQM-711 POWER QUALITY ANALYZER

Accessories for power quality analyzers

Reach for more

Measurements Installation Configuration Software

Sonel® global measurements

Get to know the instrument before buying

www.sonel.com

Expand your capabilities with additional accessories