


# AC2465



## AS-Interface CompactLine module

CompactLineM12 4DI 4DO M12

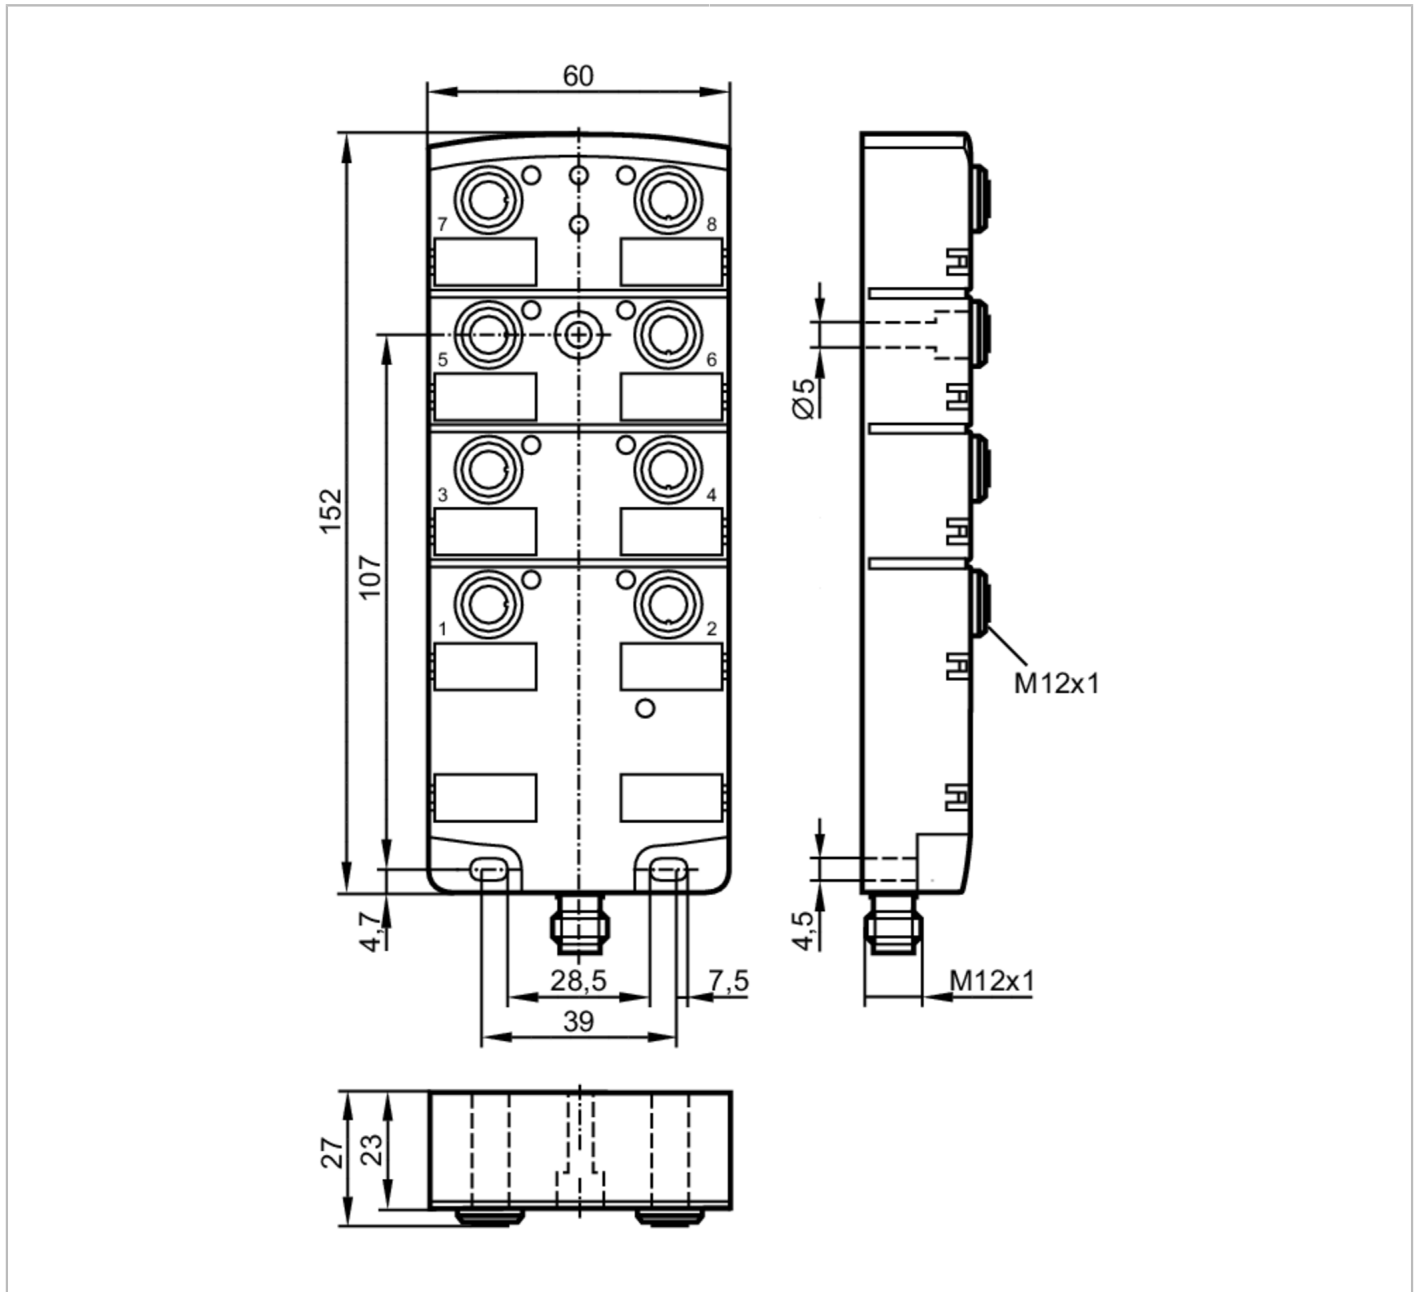

Application	
Application	field installation
Electrical data	
Operating voltage [V]	26.5...31.6 DC
Max. current consumption from AS-i [mA]	250
Max. current load total [A]	4
Additional voltage supply [V]	10...30 DC; (AUX)
Max. current consumption from additional supply [mA]	4000; (AUX)
Integrated watchdog	yes



## AS-Interface CompactLine module

CompactLineM12 4DI 4DO M12

Inputs / outputs	
Number of inputs and outputs	Number of digital inputs: 4; Number of digital outputs: 4
Inputs	
Number of digital inputs	4
Input circuit of digital inputs	PNP; (type 2 according to IEC 61131-2)
Sensor supply of the inputs	AS-i
Voltage supply [V]	20...30; (DC)
Max. total current rating of inputs [mA]	200
Input current limitation [mA]	15
Input current High [mA]	6...10
Input current low [mA]	0...2
Switching level high [V]	> 11
Digital inputs protected against short circuits	yes
Outputs	
Number of digital outputs	4
Circuit	PNP
Voltage range DC [V]	10...30; (AUX)
Max. current load per output [mA]	2000; (utilization category DC-13 (control of electromagnets): 20 W (IEC 60947-5-1))
Max. current load outputs total [A]	4
Short-circuit proof	yes
Electrically separated	yes
Actuator supply outputs	AUX
Operating conditions	
Ambient temperature [°C]	-25...80
Storage temperature [°C]	-25...80
Max. relative air humidity [%]	90; (non condensing)
Max. height above sea level [m]	2000
Protection	IP 67; (when flat cables are used E7400x / E7401x)
Tests / approvals	
EMC	EN 61000-6-2
	EN 62026-2
	EN 50581
MTTF [years]	193
UL approval	voltage supply Class 2
AS-i classification	
AS-i version	2.11; 3.0
AS-i addressing	IR addressing possible
Extended addressing mode	no
AS-i master profile	M2; M3; M4
AS-i profile	S-7.0.E
AS-i I/O configuration [hex]	7
AS-i ID code [hex]	0.E

# AC2465



## AS-Interface CompactLine module

CompactLineM12 4DI 4DO M12

AS-i certificate	46001				
Data bits	Data bit	D0	D1	D2	D3
	Input	1	2	3	4
	Socket	I-1	I-2	I-3	I-4
	Pin	2+4	2+4	2+4	2+4
	Output	1	2	3	4
	Socket	O-1	O-2	O-3	O-4
	Pin	4	4	4	4

### Mechanical data

Weight	[g]	386
Material	PA; Socket: brass nickel-plated; O-ring: FKM	

### Displays / operating elements

Display	Switching status	LED, yellow I1...I4, O1...O4
	Power	LED, green AS-i, AUX
	errors	LED, red

### Electrical connection

Module connection	M12
-------------------	-----

### Accessories

Accessories (optional)	stainless steel sleeve, for installation in case of high mechanical stress , E70402
------------------------	---

### Remarks

Remarks	Do not connect any of the following points to an external potential: I-, I+, I1, I2, I3, I4 The connections are electrically connected with the AS-i cable.
Pack quantity	1 pcs.

### Electrical connection - AS-i

Connector: M12; coding: A



1	AS-i +
2	AUX -
3	AS-i -
4	AUX +




## AS-Interface CompactLine module

CompactLineM12 4DI 4DO M12

### Electrical connection - Inputs


Connector: M12; coding: A



	Inputs
1	Sensor supply L+
2+4	Data input 1 internally bridged
3	Sensor supply L-
5	functional earth

### Electrical connection - Outputs

Connector: M12; coding: A



	Outputs
3	External voltage AUX -
4	Switching output
5	functional earth (FE)