


# AC2471



## AS-Interface CompactLine module

CompactM12 4DI-Y 4DO

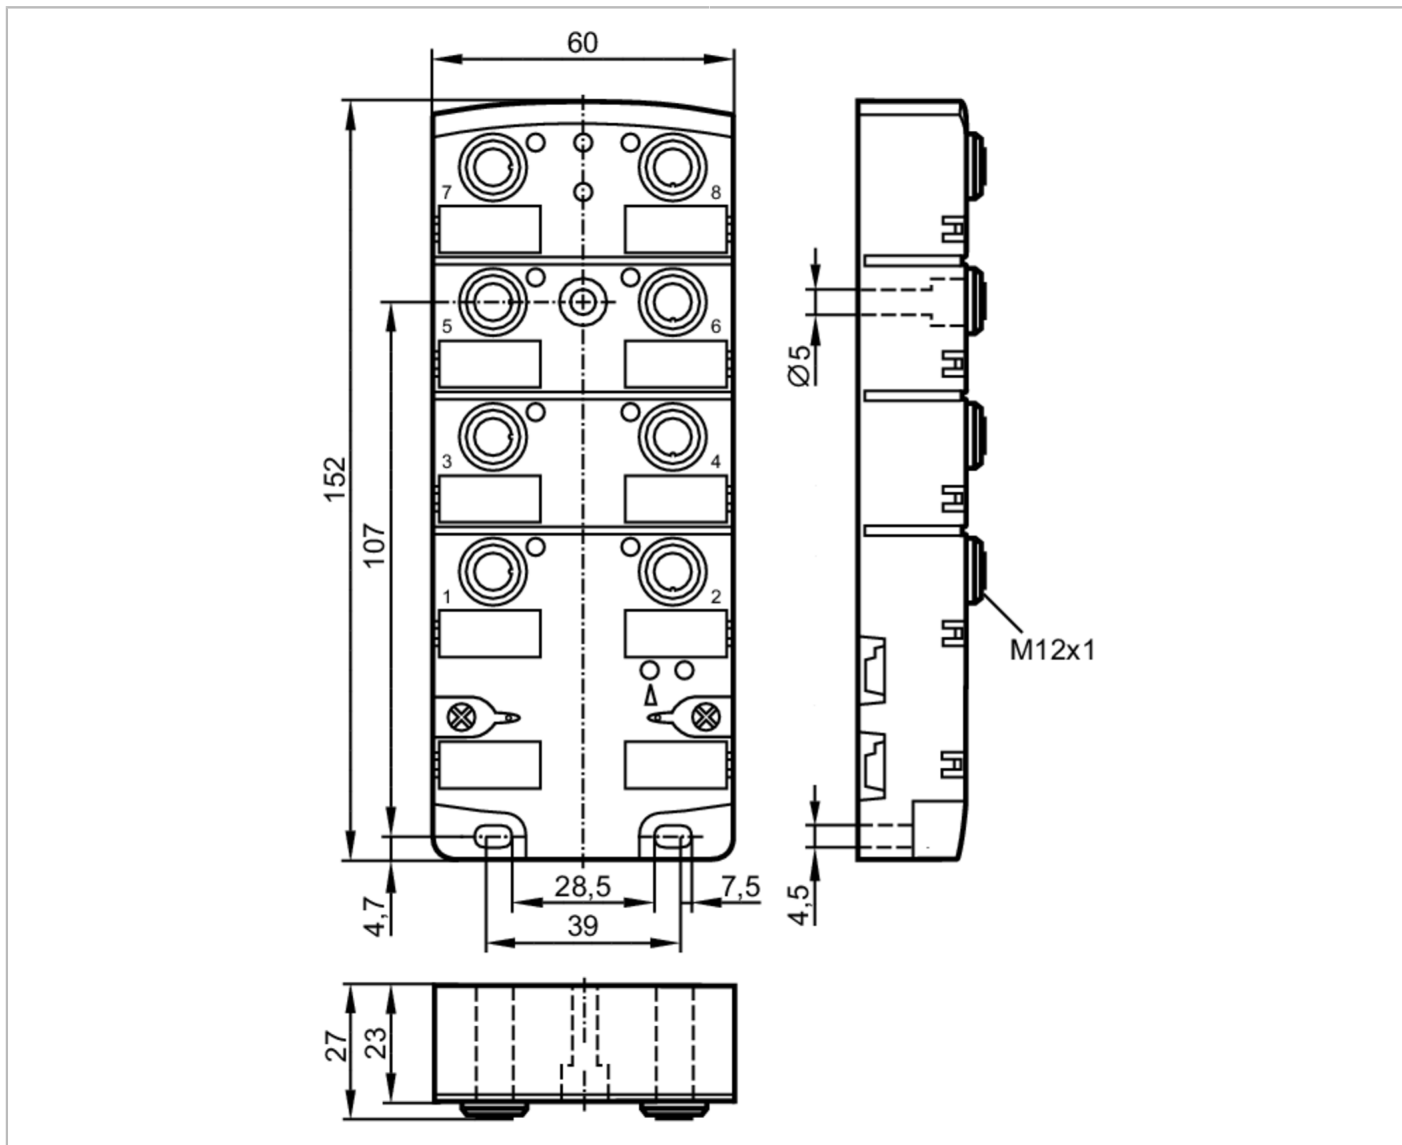

Application	
Design	Only for operation with AS-i masters with the profile M4
Application	field installation
Electrical data	
Operating voltage [V]	26.5...31.6 DC
Max. current consumption from AS-i [mA]	250
Max. current load total [A]	4
Additional voltage supply [V]	10...30 DC; (AUX)
Max. current consumption from additional supply [mA]	4000; (AUX)
Integrated watchdog	yes
Inputs / outputs	
Number of inputs and outputs	Number of digital inputs: 4; Number of digital outputs: 4



## AS-Interface CompactLine module

CompactM12 4DI-Y 4DO

Inputs		
Number of digital inputs		4
Input circuit of digital inputs		PNP; (type 2 according to IEC 61131-2)
Sensor supply of the inputs		AS-i
Voltage supply [V]		20...30; (DC)
Max. total current rating of inputs [mA]		200
Input current limitation [mA]		15
Input current High [mA]		6...10
Input current low [mA]		0...2
Switching level high [V]		> 11
Digital inputs protected against short circuits		yes
Outputs		
Number of digital outputs		4
Circuit		PNP
Voltage range DC [V]		10...30; (AUX)
Max. current load per output [mA]		2000; (utilization category DC-13 (control of electromagnets): 20 W (IEC 60947-5-1))
Max. current load outputs total [A]		4
Short-circuit proof		yes
Electrically separated		yes
Actuator supply outputs		AUX
Operating conditions		
Ambient temperature [°C]		-25...80
Storage temperature [°C]		-25...80
Max. relative air humidity [%]		90; (non condensing)
Max. height above sea level [m]		2000
Protection		IP 67; (when flat cables are used E7400x / E7401x)
Tests / approvals		
EMC	EN 61000-6-2	
	EN 62026-2	
	EN 50581	
MTTF [years]		190
UL approval	voltage supply	Class 2
AS-i classification		
AS-i version		3.0
AS-i addressing		IR addressing possible
Extended addressing mode		yes
AS-i master profile		M4
AS-i profile		S-7.A.7
AS-i I/O configuration [hex]		7
AS-i ID code [hex]		A.7
AS-i certificate		97001

# AC2471



## AS-Interface CompactLine module

CompactM12 4DI-Y 4DO

Data bits	Data bit	D0	D1	D2	D3
	Input	1	2	3	4
	Socket	I-1/2	I-1/2 / I-2	I-3/4	I-3/4 / I-4
	Pin	4	2 4	4	2 4
	Output	1	2	3	4
	Socket	O-1	O-2	O-3	O-4
	Pin	4	4	4	4

### Mechanical data

Weight [g]	379
Type of mounting	AS-i flat cable connection
Material	PA; Socket: brass nickel-plated; threaded inserts in the lower part: brass nickel-plated; O-ring: FKM; Piercing contacts: CuSn6 nickel-plated and tin-plated

### Displays / operating elements

Display	Switching status	LED, yellow I1...I4, O1...O4
	Power	LED, green AS-i, AUX
	errors	LED, red

### Electrical connection

Module connection	Flat cable
-------------------	------------

### Accessories

Items supplied	stainless steel sleeve for installation in case of high mechanical stress , E70402
----------------	--

### Remarks

Remarks	Do not connect any of the following points to an external potential: I-, I+, I1, I2, I3, I4 The connections are electrically connected with the AS-i cable.
Pack quantity	1 pcs.

### Electrical connection - Inputs

#### Connection

Connector: M12

	Inputs
1	Sensor supply +
2	Data input
3	Sensor supply -
4	Data input
5	functional earth (FE)

# AC2471




## AS-Interface CompactLine module

CompactM12 4DI-Y 4DO

### Electrical connection - Outputs

Connector: M12; coding: A



	Outputs
3	External voltage AUX -
4	Switching output
5	functional earth (FE)
1, 2	not used