


# EBC034



## Wiring block

ZDO8H050MSS0010H19

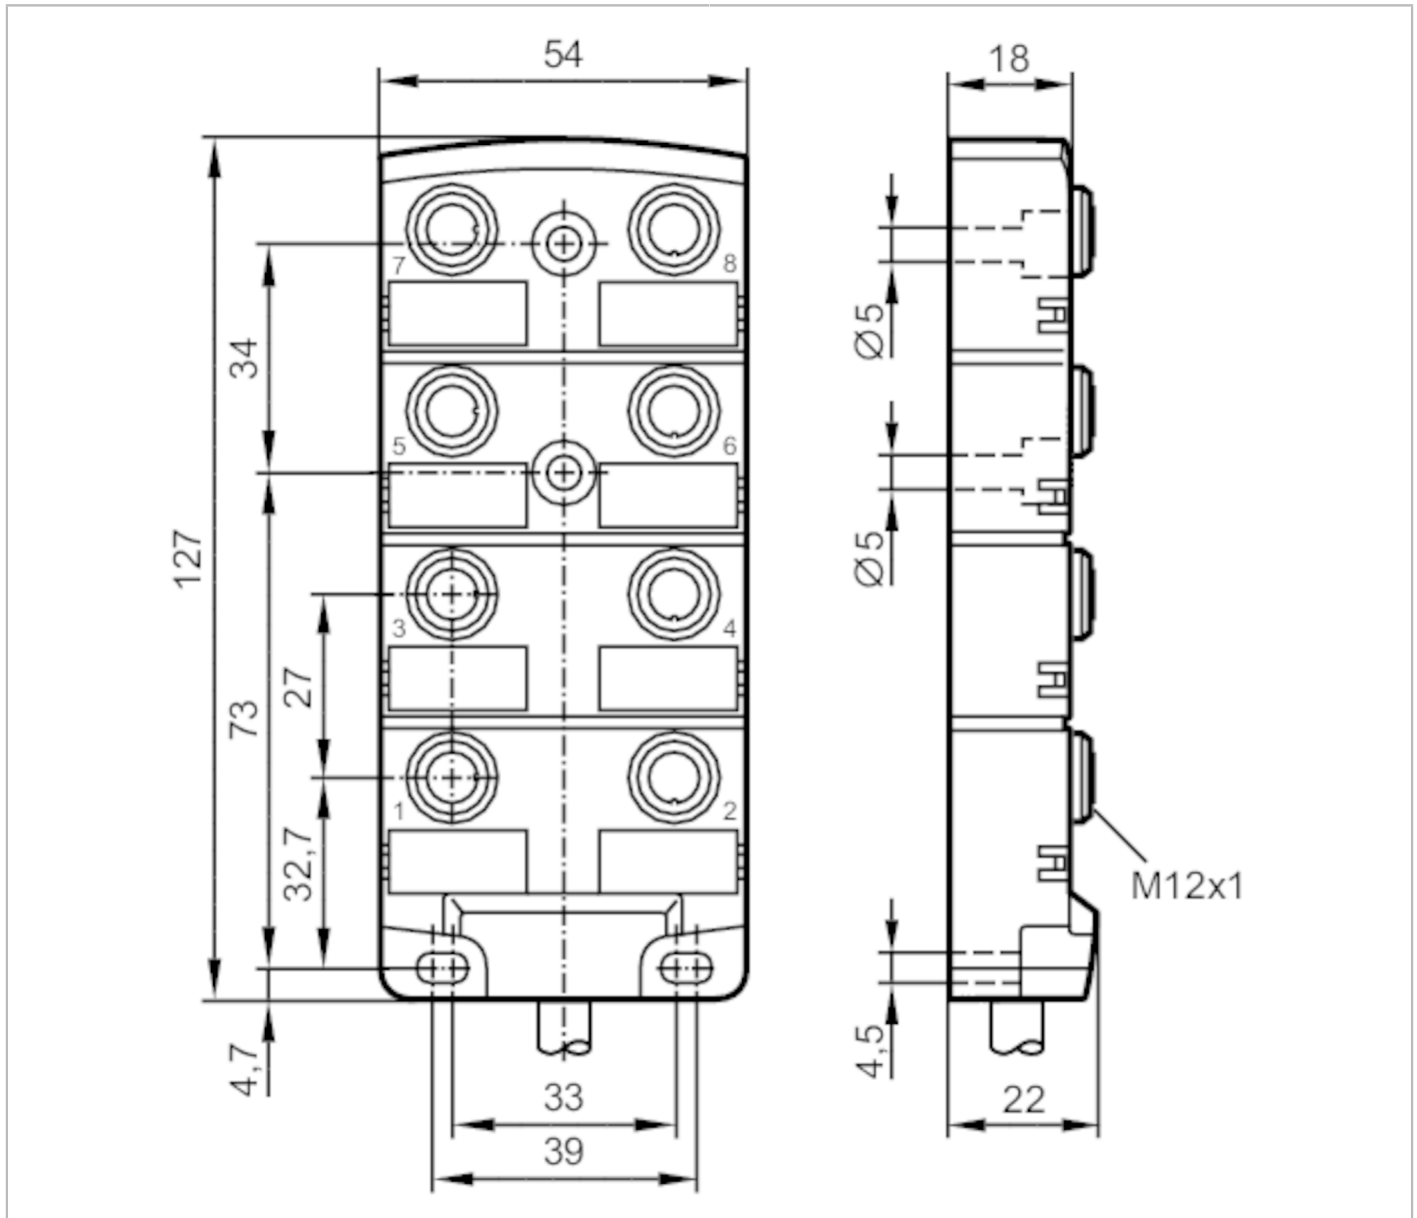

Application	
System	Free from silicone; Halogen-free; gold-plated contacts; Drag chain suitability
Free from silicone	yes
Electrical data	
Operating voltage [V]	< 30 DC; (cULus - Class 2 source required)
Protection class	II
Max. current load per module/slot [A]	4
Max. current load total [A]	12
Operating conditions	
Ambient temperature [°C]	-25...80
Ambient temperature (moving) [°C]	-5...60

# EBC034



## Wiring block

ZDO8H050MSS0010H19

Protection	IP 67; IP 68
------------	--------------

### Mechanical data

Weight [g]	1575.5	
Dimensions [mm]	22 x 54 x 127	
Material	PA	
Molded-body material	PA	
Number of ports splitter box	8	
Connector type	M12	
Drag chain suitability	yes	
Drag chain suitability	Bending radius for flexible applications	min. 10 x cable diameter
	Travel speed	max. 3.3 m/s for a horizontal travel length of 5 m and max. acceleration of 5 m/s <sup>2</sup>
	Bending cycles	> 2 Mio.
	Torsional strain	± 30 °/m

### Accessories

Items supplied	Protective caps: 2 labels: 8
----------------	---------------------------------

### Remarks


Pack quantity	1 pcs.
---------------	--------

### Electrical connection

Cable: 10 m, PUR, Halogen-free, black, Ø 9.7 mm; 16 x 0.34 mm<sup>2</sup> (43 x Ø 0.1 mm) + 3 x 0.75 mm<sup>2</sup> (95 x Ø 0.1 mm)

### Electrical connection - slot

Connector: 8 x M12; coding: A; Moulded body: PA; Contacts: gold-plated; Tightening torque: 0.8...1.5 Nm





## Wiring block

ZDO8H050MSS0010H19

### Connection

<u>BN</u>	1 (1...8)
<u>BU</u>	3 (1...8)
<u>GN/YE</u>	5 (1...8)
<u>GY/PK</u>	2 (1)
<u>RD/BU</u>	2 (2)
<u>WH/GN</u>	2 (3)
<u>BN/GN</u>	2 (4)
<u>WH/YE</u>	2 (5)
<u>YE/BN</u>	2 (6)
<u>WH/GY</u>	2 (7)
<u>GY/BN</u>	2 (8)
<u>WH</u>	4 (1)
<u>GN</u>	4 (2)
<u>YE</u>	4 (3)
<u>GY</u>	4 (4)
<u>PK</u>	4 (5)
<u>RD</u>	4 (6)
<u>BK</u>	4 (7)
<u>VT</u>	4 (8)

	Core colors :
BK =	black
BN =	brown
BU =	blue
GN =	green
GY =	grey
PK =	pink
RD =	red
VT =	lilac
WH =	white
YE =	yellow