


PS307A



Hydrostatic submersible pressure transmitter

SUBMERSIBLE 0,6BAR 10M FEP CABLE 1G/1D

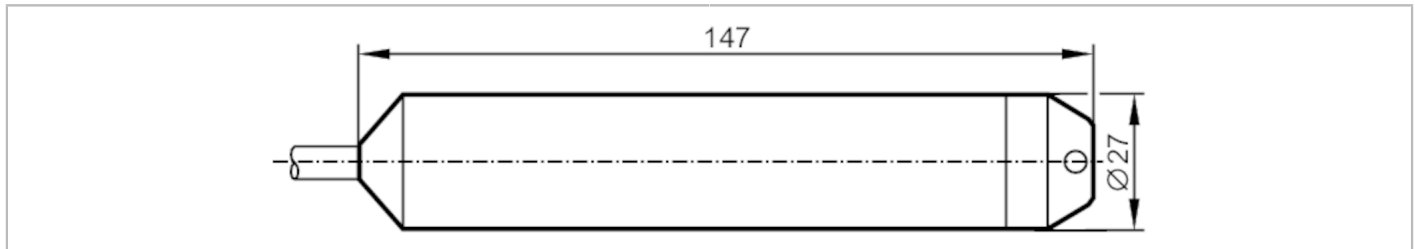

Product characteristics					
Number of inputs and outputs	Number of analog outputs: 1				
Measuring range	0...0.6 bar	0...600 mbar	0...8.7 psi	0...240.9 inH2O	0...60 kPa
Application					
Application	for industrial applications				
Media	Liquids				
Medium temperature [°C]	-10...60; (T6: -10...60 °C; T5: -10...80 °C; T4: -10...85 °C; 1 D, 1/2 D, 2 D (750 mW): -10...40 °C; (650 mW): -10...70 °C; (550 mW): -10...85 °C)				
Min. bursting pressure	4.8 bar	70 psi	480 kPa		
Pressure rating	4 bar	58 psi	400 kPa		
Type of pressure	relative pressure				
Electrical data					
Switching amplifiers	Connection to intrinsically safe supply isolators (Ex ia)				
Operating voltage [V]	10...30 DC				
Protection class	III				
Reverse polarity protection	yes				
Measuring principle	hydrostatic				
Inputs / outputs					
Number of inputs and outputs	Number of analog outputs: 1				
Outputs					
Total number of outputs	1				
Output signal	analog signal				
Number of analog outputs	1				
Analog current output [mA]	4...20				
Max. load [Ω]	700; (U _b = 24 V; (U _b - 10 V) / 20 mA)				
Short-circuit protection	yes				
Measuring/setting range					
Measuring range	0...0.6 bar	0...600 mbar	0...8.7 psi	0...240.9 inH2O	0...60 kPa
Accuracy / deviations					
Repeatability [% of the span]	< 0,1; (with temperature fluctuations < 10 K)				
Characteristics deviation [% of the span]	< 0,25 (BFSL) / 0,5; (incl. linearity, zero and span error (limit value setting); BFSL = Best Fit Straight Line)				
Linearity deviation [% of the span]	< 0,2 (BFSL)				
Long-term stability [% of the span]	< 0,2; (per year)				

PS307A



Hydrostatic submersible pressure transmitter

SUBMERSIBLE 0,6BAR 10M FEP CABLE 1G/1D

Temperature coefficient zero point [% of the span / 10 K]	< ± 0,2; (0...50 °C)
Temperature coefficient span [% of the span / 10 K]	< ± 0,2; (0...50 °C)
Operating conditions	
Ambient temperature [°C]	-10...60
Note on ambient temperature	T6: -10...60 °C
	T5: -10...80 °C
	T4: -10...85 °C
	1 D, 1/2 D, 2 D (750 mW): -10...40 °C
	1 D, 1/2 D, 2 D (650 mW): -10...70 °C
	1 D, 1/2 D, 2 D (550 mW): -10...85 °C
Storage temperature [°C]	-10...60
Protection	IP 68
Tests / approvals	
Approval	BVS 10 ATEX E 132 X; IECEx BVS 10.0085 X
ATEX marking	Ex I M1 Ex ia I Ma
	Ex II 1 G Ex ia IIA T4/T5/T6 Ga
	Ex II 1/2G Ex ia IIC T4/T5/T6 Ga/Gb
	Ex II 2 G Ex ia IIC T4/T5/T6 Gb
	Ex II 1D Ex ia IIIC T120°C Da
MTTF [years]	969
Pressure equipment directive	sound engineering practice; can be used for group 2 fluids; group 1 fluids on request
Mechanical data	
Weight [g]	1034.2
Material	stainless steel (1.4571/316Ti)
Remarks	
Pack quantity	1 pcs.

PS307A




Hydrostatic submersible pressure transmitter

SUBMERSIBLE 0,6BAR 10M FEP CABLE 1G/1D

Electrical connection

Cable: 10 m, FEP, Ø 7.5 mm

Connection

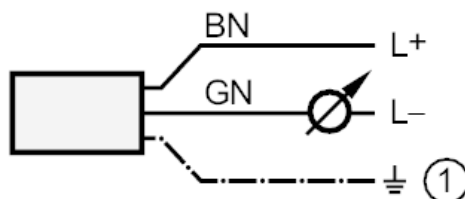

1: screen (connected to the housing)

Core colors :

BN = brown

GN = green