


*	Exit program, cancel call	23	Lock-out Count
#	Save program	24	Alarm 0= disable 1= local beep for 60 seconds 2= disable system for 60 seconds with no beep 3= call directory (0-9)
00	Change master code (0000 is default)	25	Keypad beep 0= disable (default) 1=enable
01	Add new forwarding tenant's directory	26	Door beep 0= disable 1= enable (default)
02	Edit existing tenant's directory	27	Talk time (060-240 second). Default=60 second
03	Delete existing tenant's directory	28	Unlock relay1 time (12-99 second). Default= 12 second
04	Clear all forwarding tenant's directory	29	Unlock relay2 time (12-99 second). Default= 12 second
05	Enable/Disable Call	33	Temporary code
06	New access code	34	Special code
07	Delete access code	35	Temporary card
08	Clear all access code	36	Special card
09	Access code digit (4-8 digit). Default is 4-digit	38	System acknowledge (0-9). Default= 3
10	Add new card	39	Remote access 0= disable 1=enable (default)
11	Delete card	40	DTMF relay 1 (0-9). Default=9
12	Clear all card	41	DTMF relay 2 (0-9). Default=8
13	Set time	42	Relay 2 Mode 1= door control (default) 2= relay 2 trigger simultaneously as relay 1 3= enable if function code 24 is enable 4= turn relay 2 on and off On=7, Off=6
14	Set date	43	DND: do not disturb time zone (0-9)
15	Initializing event recording	44	Disable Time zone relay 1, 2 or both
16	AUS= auto unlock schedule (0-9 schedule)	45	Relay 1 and 2 unlock timer
17	TMZ= time zone. 20 TMZ, 00-20.	46	Firmware version
18	HLD= holiday zone. 20 HLD, 1-20	48	PBX enable. Default= disable
19	Directory digit (2-4 digit). Default is 2-digit	49	Edit Access code
20	AUXIN1 0= disable (default) 1= enable control by relay 1 open interval 2= relay 1 control by AuxIn2	50	Erase the memory to factory default
21	AUXIN2 0= disable (default) 1= enable control by relay 2 open interval 2= relay 2 control by AuxIn2	51	Welcome screen
22	Do not disturb 0= disable (default), 1= enable		

PACH AND COMPANY INC.
SAN CLEMENTE, CALIFORNIA 888-678-7224 949-498-2951
QUANTUM Q7000iP SERIES



- [24 Months warranty](#) for complete system
- [6 Months warranty](#) for Printed Circuit Board

	<p>Log on to programming: Press 0 # simultaneously then release, the welcome message will stop scrolling (repeat if screen still scrolling) enter 4-digit "MASTER CODE" (0000 is default), the screen will show as below:</p> <div style="border: 1px solid black; background-color: #ffff00; padding: 2px; text-align: center; margin: 5px 0;">Select Func: _ _</div> <p>Select the "Function Code" from the table</p>
--	---

OPERATION

Two ways to call tenant

1. Press **3** to scroll name from A-Z or **6** to scroll name from Z-A then press **#** to call name selected.
2. Press **#** wait for dial tone then press the directory number
Opening the door remotely press **9** (relay 1) or **8** (relay 2)

Open the door with the access code press ***** (display screen will stop scrolling) then press a valid 4-digit access code.


Extend talk time tenant must press **#** from the phone after the time out warning beep.

Call into the system:

1. Enable function code 39 and function code 38 must be set 1-9
2. Call the system phone number, hear one beep if the system answering the call.
3. Press **#** then 4-digit master code, hear one short beep
4. Press ***** to establish two way communication
5. Press **9** or **8** to release the door.

QWCM iP BROWSER DEFAULT IP

IP: 192.168.1.230
SUBNET: 255.255.255.0
GATEWAY: 192.168.1.1
DNS: 192.168.1.1
USERNAME: Administrator
PASSWORD: 8888 or pach

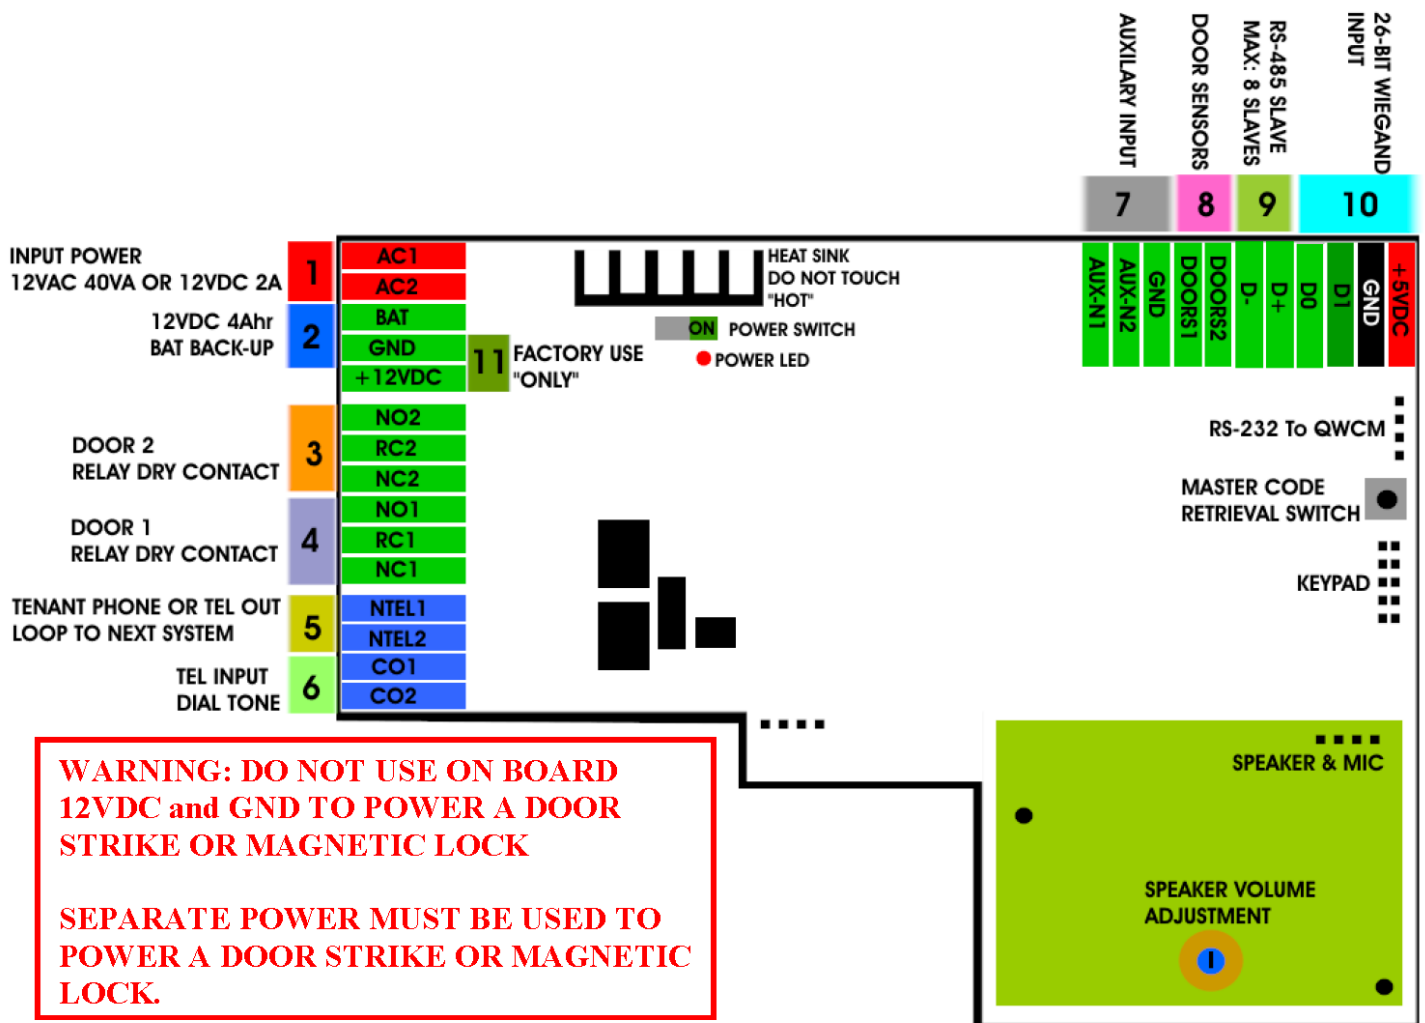

1. **INPUT POWER** 12VAC 40VA SUPPLIED (voltage measurement must be 12.5-14.0 VAC) OR 12VDC 2A adjustable power supply (voltage measurement must be 13.5-14.0 VDC)
2. 12 VDC 4Ahr BATTERY BACK-UP (OPTIONAL) **WARNING:** THIS IS NOT INPUT POWER
3. DOOR 2 DRY CONTACT RELAY, MUST USE SEPARATE POWER FOR DOOR STRIKE
4. DOOR 1 DRY CONTACT RELAY, MUST USE SEPARATE POWER FOR DOOR STRIKE
5. TELEPHONE OUT LOOP TO NEXT QC SYSTEM, IF TELEPHONE LINE IS SHARED
6. TELEPHONE INPUT ANALOG DIAL TONE "ONLY"
7. AUX 1 AND AUX 2 FOR EXIT SWITCH, LOOP DETECTOR OR ANY INPUT DEVICE WITH DRY CONTACT OUTPUT.
8. DOORS1 AND DOORS 2 SENSOR. **WARNING:** THESE ARE NOT DOOR CONTACTS
9. RS-485 PORT, CONNECT TO SLAVE UNITS (USCR, UCRM, USKP AND USKPR) UP TO 8 UNITS
10. 26-WIEGAND INPUT. PROPRIETARY CARD READER IS BUILT-IN ON THE QC SERIES. DISCONNECT THE BUILT-IN READER IF YOU ARE USING YOUR OWN CARD READER.
11. FACTORY USE "ONLY" TO POWER THE QWCM IP MODULE AND FAN. **WARNING:** "DO NOT USE THE +12VDC POWER TO POWER ANY OTHER DEVICES".

Technical Support is available
 Monday-Friday 7:00 am-4:00 pm PST at 1-888-678-7224
 Technical Info and complete manual are available
 online www.pach-co.com